


NF ELIT HEXA

KEY BENEFITS

100% BIRCH PLYWOOD COATED WITH SLIP-RESISTANT MATERIAL WITH HEXAGONAL PATTERN FOR MAKING FLOORS IN LIGHT COMMERCIAL VEHICLES AND OTHER FLOORING APPLICATIONS WHERE EASY CARE AND BEAUTIFUL APPEARANCE ARE VALUED: WAREHOUSES, PLAY AND SPORTS GROUNDS, CONCERT VENUES, ETC.

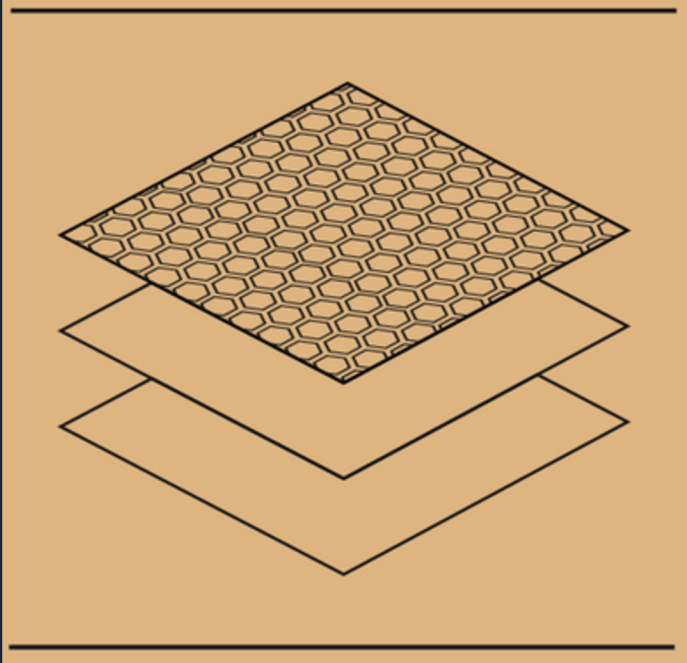


100% BIRCH PLYWOOD
FOR LIGHT COMMERCIAL
VEHICLE FLOORING

Phone / WhatsApp:

(513) 255-3103


Email:

info@nfelitwood.com

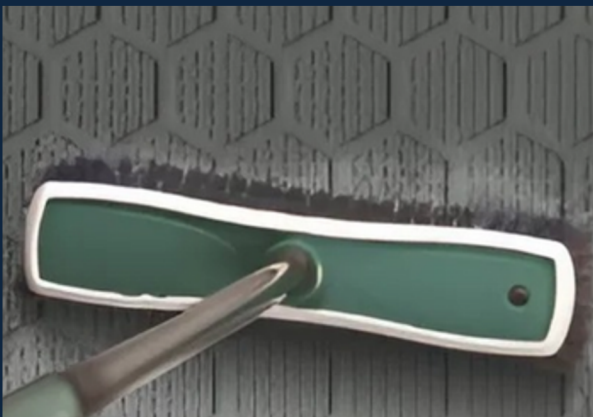

EASY CARE

RAISED
HEXA PATTERN



RESISTANT
TO WEAR



EXCELLENT WEAR
RESISTANCE

TABER VALUE 350R-600R



R10 ANTI-SLIP RATING

ANTI-SLIP



EASY CARE



CHOICE OF COLORS

Anti-Slip • Durable • ReadyforHardWork

Key Features

100%birch corefor high strength

Hexagonal phenolic film, R10 anti-slip Taber

wear resistance 350 – 600 cycles Easy-

*clean, waterproof surface (WBP
glue)*

Lowformaldehyde–CARB P2 / TSCA VI/ E1

Available Colors

DarkBrown • Black • Light Gray • Stone Gray

Sizes & Thicknesses

*4x8ft • 5 x 10 ft • 5x5ft (1220x2440 mm,
1525x3050 mm, 1525x1525 mm)*

*Standard thickness: ½" – 1 ¼" (12 – 30
mm). Up to 1.57" (40 mm) on request*

Typical Applications

*Light commercial vehicle floors Warehouse
and stage decks Sports & play flooring*

TECHNICAL SPECIFICATIONS & COMPLIANCE

Mechanical Properties*

*Staticbending – Modulus of Rupture: 8.7
ksi along / 4.4 ksi across (60 / 30 MPa)*

*Modulus of Elasticity: 870 ksi along /
435 ksi across (6000 / 3000 MPa)*

Density: 40 – 44 lb/ft³ (640 – 700 kg/m³)

**Typicalvalueson ¾" (18 mm) panels.*

Bonding

*Phenol-formaldehyde WBP (exterior) per
PS 1-09.*

Quality & Safety


Thickness tolerance±0.008 in (±0.2 mm)

*Moisture 5 – 12 % Face / back: Hexa pattern /
smooth (S2S sanded)*

Emission class ≤ 0.05 ppm (CARB P2)

Packaging & Logistics

*Plastic-filmwrappedbundlesISPM-15 heat-
treated pallets Bar-coded bundle tally sheets*

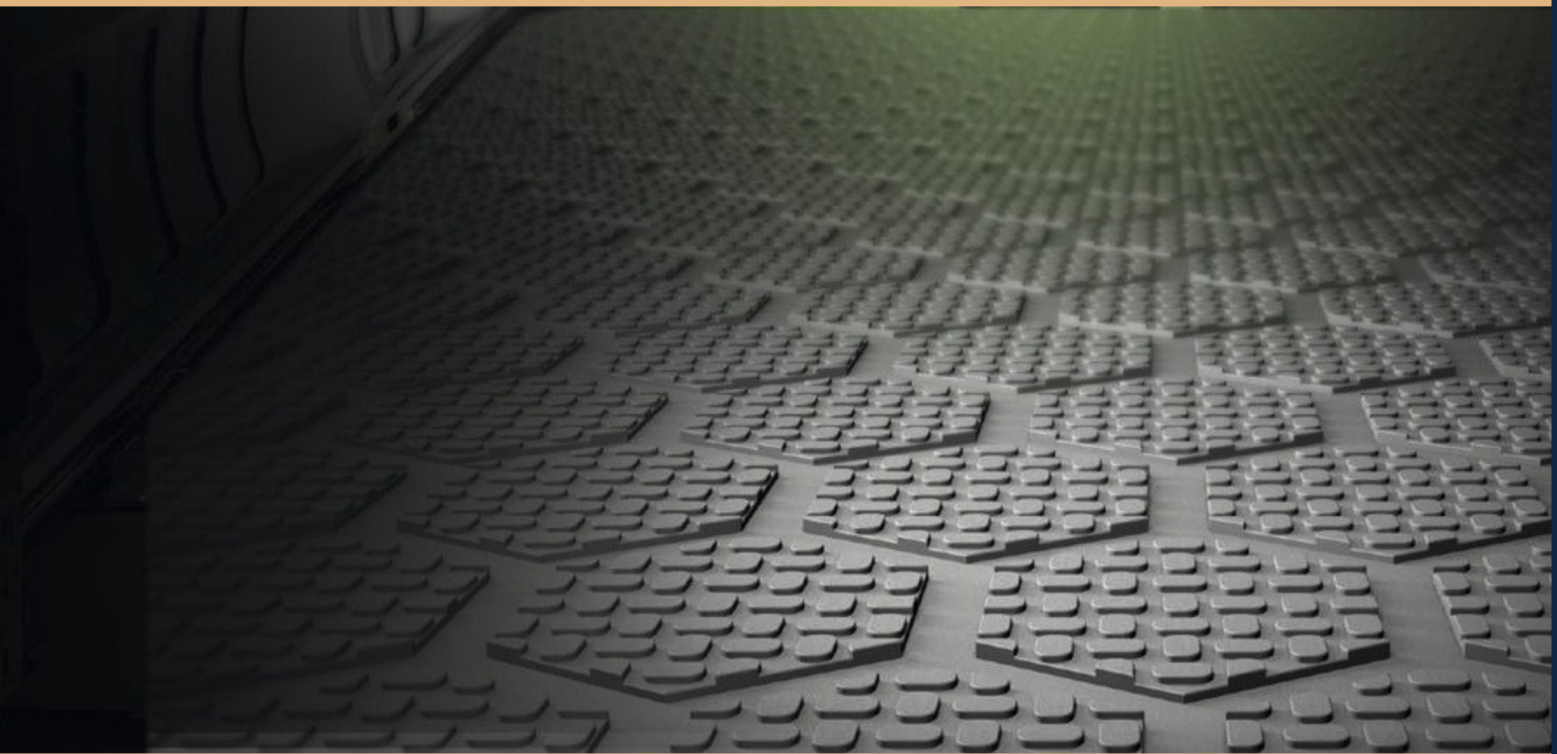

APPLICATIONS



Flooring for light commercial vehicles



Stage floors and sets



Industrial floors



Flooring for boats and yachts



Flooring for sea containers



Flooring for small vessels